

Technical Data:

Material:


Insulator body (housing): PBT, UL94-V0, Color-Black.
 Pin (outsleeve): Brass, machined, CuZn38pb2.
 Tin plated: > 40u" nickel, 100~150u" Tin Plated.
 Clip (4 finger): Beryllium copper.
 Gold plated: > 40u" nickel/full Gold-flashed(0.4u"~1u").

Electrical:

Current rating: 3 Amps / contact max.
 Insulation resistance: > 1000 MΩ at V=100V.
 Operating: 60 Veff.

Mechanical:

Operating temperature: Gold plated: -55°C to +125°C .
 Tin plated: -40°C to +105°C .
 Soldering temperature: +200°C 10s max.

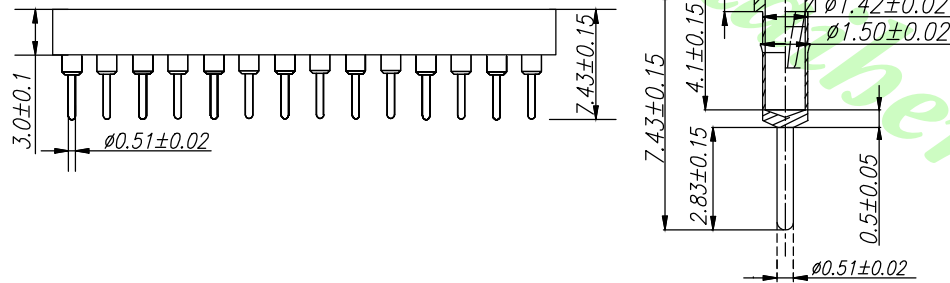

Part No.
LICS 254 R 06 0XX X

Bar:
 N:no bar
 Blank:with bar

No. of Contacts:
 XX:24~48

06:0.6 Inch(15.24mm) Wide(寬)

R:Round Pin
 (Machined pin)

Pitch:2.54mm

Series No.:IC Socket

Part No.	BAR	No of contacts	Dim A	Dim B
LIS254R06024N	no bar	24	27.94	30.48
LIS254R06028N	no bar	28	33.02	35.56
LIS254R06032N	no bar	32	38.10	40.64
LIS254R06040N	no bar	40	48.26	50.80
LIS254R06020	with bar	20	22.86	25.40
LIS254R06024	with bar	24	27.94	30.48
LIS254R06028	with bar	28	33.02	35.56
LIS254R06032	with bar	32	38.10	40.64
LIS254R06036	with bar	36	43.18	45.72
LIS254R06040	with bar	40	48.26	50.80
LIS254R06042	with bar	42	50.80	53.34
LIS254R06048	with bar	48	58.42	60.96

A0	NEW DRAWING	2018.08.16
REV	概述/REVISION	日期/DATE

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm
比例/Scale	Free
Size	A4

品名/Title :	IC SOCKET 2.54mm Round Pin 0.6 Inch Wide
料號/Part No. :	LICS254R060XX X
圖號/Drawing No. :	ISMXXT1/06(S600-T1)

鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1

REV. A0