

Technical Data:

Material:

Insulator body (housing): PBT, UL94-V0, Color-Black.

Pin (outsleeve): Brass, machined, C3602.

Plating: Gold Plated.

50u" nickel/full gold-flashed.

Electrical:

Current rating: 3 Amps / contact max.


Insulation resistance: > 1000 MΩ at V=100V.

Operating: 60 Veff.

Mechanical:

Operating temperature: Gold plated: -55°C to +125°C .

Soldering temperature: +200°C ,10s max.

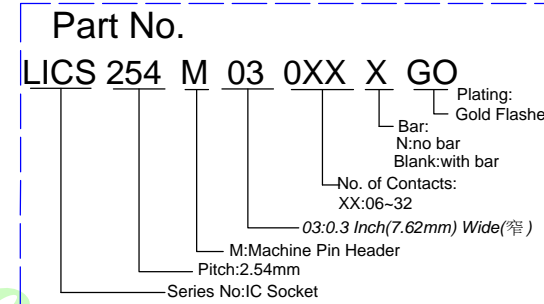

Part No.	BAR	No of contacts	Dim A	Dim B
LICS254M03006NGO	no bar	6	5.08	7.62
LICS254M03008NGO	no bar	8	7.62	10.16
LICS254M03010NGO	no bar	10	10.16	12.70
LICS254M03012NGO	no bar	12	12.70	15.24
LICS254M03014NGO	no bar	14	15.24	17.78
LICS254M03016NGO	no bar	16	17.78	20.32
LICS254M03018GO	with bar	18	20.32	22.86
LICS254M03020GO	with bar	20	22.86	25.40
LICS254M03022GO	with bar	22	25.40	27.94
LICS254M03024GO	with bar	24	27.94	30.48
LICS254M03028GO	with bar	28	33.02	35.56
LICS254M03032GO	with bar/2	32	38.10	40.64

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
A0	NEW DRAWING	2018.08.16	
REV	概述/REVISION	日期/DATE	

單位/Unit	品名/Title :
mm	2.54mm Machined Pin Header IC Socket (0.3 inch Wide)
比例/Scale	Gold Plated
Free	料號/Part No :
Size	LICS254M030XX X GO
A4	圖號/Drawing No :
	ISMXXG3/03(S300-G3)

鍊亨電子有限公司
LAI HENG TECHNOLOGY LTD.
TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. 7/0 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1

REV. A0