






Electrical Characteristics:

Current rating: 0.5A AC/DC.
 Voltage rating: 50V AC/DC.
 Temperature range: -25°C ~ +85°C.
 Withstand Voltage: 500V AC/Minute.
 Contact Resistance: 40mΩ.
 Insulation resistance: 500MΩ.
 Relative Humidity: 93%+40°C.

Material Description:

Terminal: Phosphor Bronze, Tin-plated.
 Fitting Nail: Brass, Tin-plated.
 Housing: LCP, UL94V-0, Color: Natural.
 Slider: LCP, UL94V-0, Color: Black.

PIN NO.	A	B	C	D	E
30P	36.1	35.1	29.0	31.1	5.8
29P	35.1	34.1	28.0	30.1	
28P	34.1	33.1	27.0	29.1	
27P	33.1	32.1	26.0	28.1	
26P	32.1	31.1	25.0	27.1	
25P	31.1	30.1	24.0	26.1	
24P	30.1	29.1	23.0	25.1	
23P	29.1	28.1	22.0	24.1	
22P	28.1	27.1	21.0	23.1	
21P	27.1	26.1	20.0	22.1	
20P	26.1	25.1	19.0	21.1	
19P	25.1	24.1	18.0	20.1	
18P	24.1	23.1	17.0	19.1	
17P	23.1	22.1	16.0	18.1	
16P	22.1	21.1	15.0	17.1	
15P	21.1	20.1	14.0	16.1	
14P	20.1	19.1	13.0	15.1	
13P	19.1	18.1	12.0	14.1	
12P	18.1	17.1	11.0	13.1	
11P	17.1	16.1	10.0	12.1	
10P	16.1	15.1	9.0	11.1	
9P	15.1	14.1	8.0	10.1	
8P	14.1	13.1	7.0	9.1	
7P	13.1	12.1	6.0	8.1	
6P	12.1	11.1	5.0	7.1	
5P	11.1	10.1	4.0	6.1	
4P	10.1	9.1	3.0	5.1	

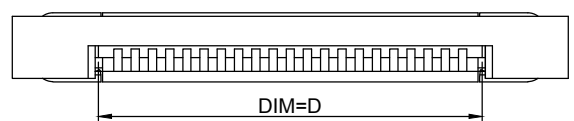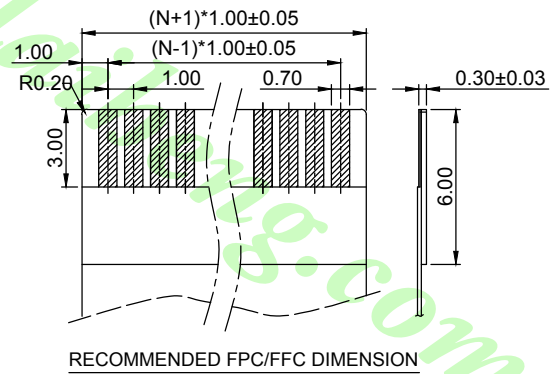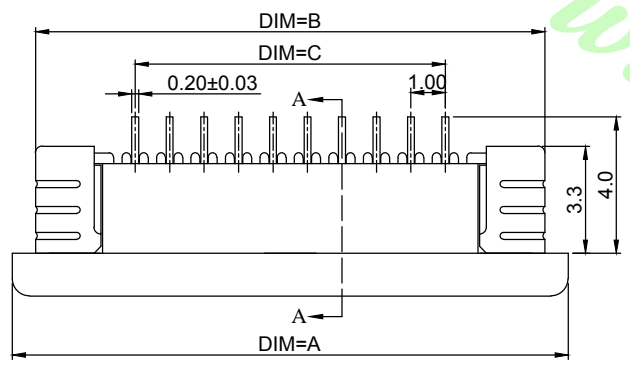

SERIES NO.	CONTACT TYPE	Pin no.	CONTACT PLATING	PACKAGE
JFPC-K814J	B	XX	PT	X
FPC 1.0 pitch ZIF R/A SMT Jumper Pin type conn.		B: Bottom contact 04~30 pin	PT : TRUE TIN G1 : Gold flash	1:Tube 2:T&R

REV	NEW DRAWING	2018.06.18	公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm	品名/Title :
REV	NEW DRAWING	2018.06.18	.X ±0.35 .XX ±0.20 ANG. ±3°	比例/Scale Free	FPC1.0Pitch ZIF Filp-Lock SMD R/A Jumper Bottom Contact
REV	概述/REVISION	日期/DATE		Size A4	料號/Part No : LFPC-K814J-B-XX-XX-X

鍊亨電子有限公司
 LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. 7/0 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1

REV. A0