

Technical Data:

Material:

Insulator body (housing): PBT, UL94-V0, Color-Black.

Pin : Brass, machined, C3602.

Plating: Gold Plated.

2um/80u" nickel, 0.025um/full gold-flashed.

Electrical:

Current rating: 3 Amps / contact max.

Insulation resistance: > 1000 MΩ at V=100V.


Operating: 60 Veff.

Mechanical:

Operating temperature: Gold plated: -55°C to +125°C .

Soldering temperature: +200°C , 10s max.

Part No.

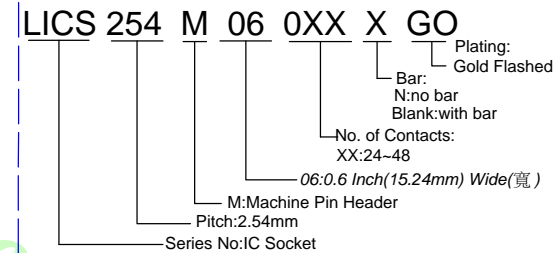

Part No.	BAR	No of contacts	Dim A	Dim B
LICS254M06024N	no bar	24	27.94	30.48
LICS254M06028N	no bar	28	33.02	35.56
LICS254M06032N	no bar	32	38.10	40.64
LICS254M06040N	no bar	40	48.26	50.80
LICS254M06020	with bar	20	22.86	25.40
LICS254M06024	with bar	24	27.94	30.48
LICS254M06028	with bar	28	33.02	35.56
LICS254M06032	with bar	32	38.10	40.64
LICS254M06036	with bar	36	43.18	45.72
LICS254M06040	with bar	40	48.26	50.80
LICS254M06042	with bar	42	50.80	53.34
LICS254M06048	with bar	48	58.42	60.96

A0	NEW DRAWING	2018.08.16
REV	概述/REVISION	日期/DATE

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

單位/Unit mm
比例/Scale Free
圖號/Part No :
料號/Part No :
A4

品名/Title :

2.54mm Machined Pin Header IC Socket (0.6 inch Wide)
Gold Plated

料號/Part No :

LICS254M060XX X GO

圖號/Drawing No :

ISMXXG3/06(S600-G3)



鍊亨電子有限公司
LAI HENG TECHNOLOGY LTD.

TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0