
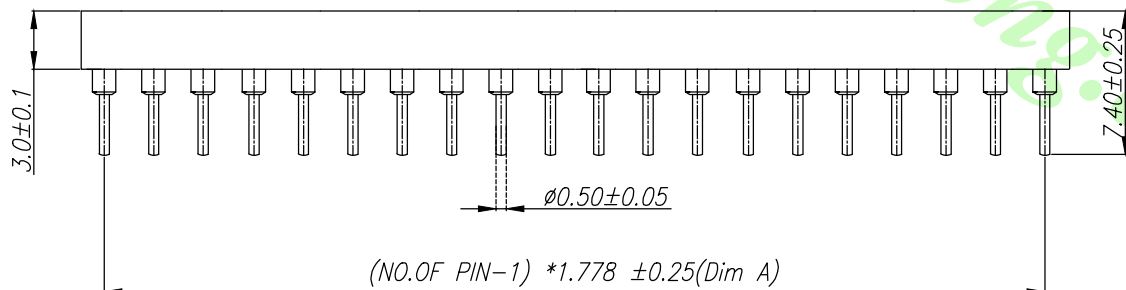


P.C.B LAYOUT

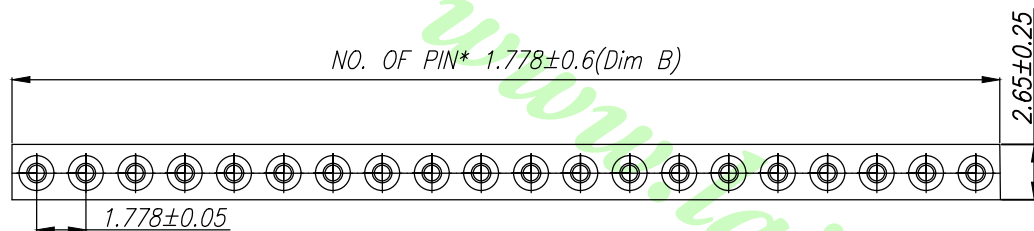

**Technical Data:**

**Material:**


Insulator body(housing):PBT black/UL94-V0  
 Pin(outer sleeve):Brass,machined,  
 Tin plated:nickel plated/150u" Tin plated  
 Clip(6 finger):Beryllium copper  
 Gold plated::nickel plated/full Gold-flashed

**Electrical**

Current rating: 3 Amps /contact Max  
 Contact resistance: 20mΩ/ contact Max  
 Insulation resistance: > 1000 MΩ at V=100 V Min  
 Operating: 60V Ac/Dc

**Mechanical**

Operating temperature:  
 Tin plated : -40°C to +105°C  
 Soldering temperature: + 240° C 10s max



Part No.

LSIP 1778 - 1 × XX

No. of Contacts:  
Single Row, XX:01~40

Pitch:1.778mm

Series No:SIP Socket

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
A0	NEW DRAWING	2018.08.16	
REV	概述/REVISION	日期/DATE	

單位/Unit	mm
比例/Scale	Free
Size	A4

品名/Title :	SIP SOCKET 1.778mm Single Row Round Pin
料號/Part No :	LSIP1778-1×XX
圖號/Drawing No :	ILMSXX-A6(1.778)/S100-A6-2

**鍊亨電子有限公司**  
 LAI HENG TECHNOLOGY LTD.  
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核准/APPD.	審核/CHKD.	製圖/DR.	張數/Sheet	REV.
7/6	Joe	Mandy	1 of 1	A0